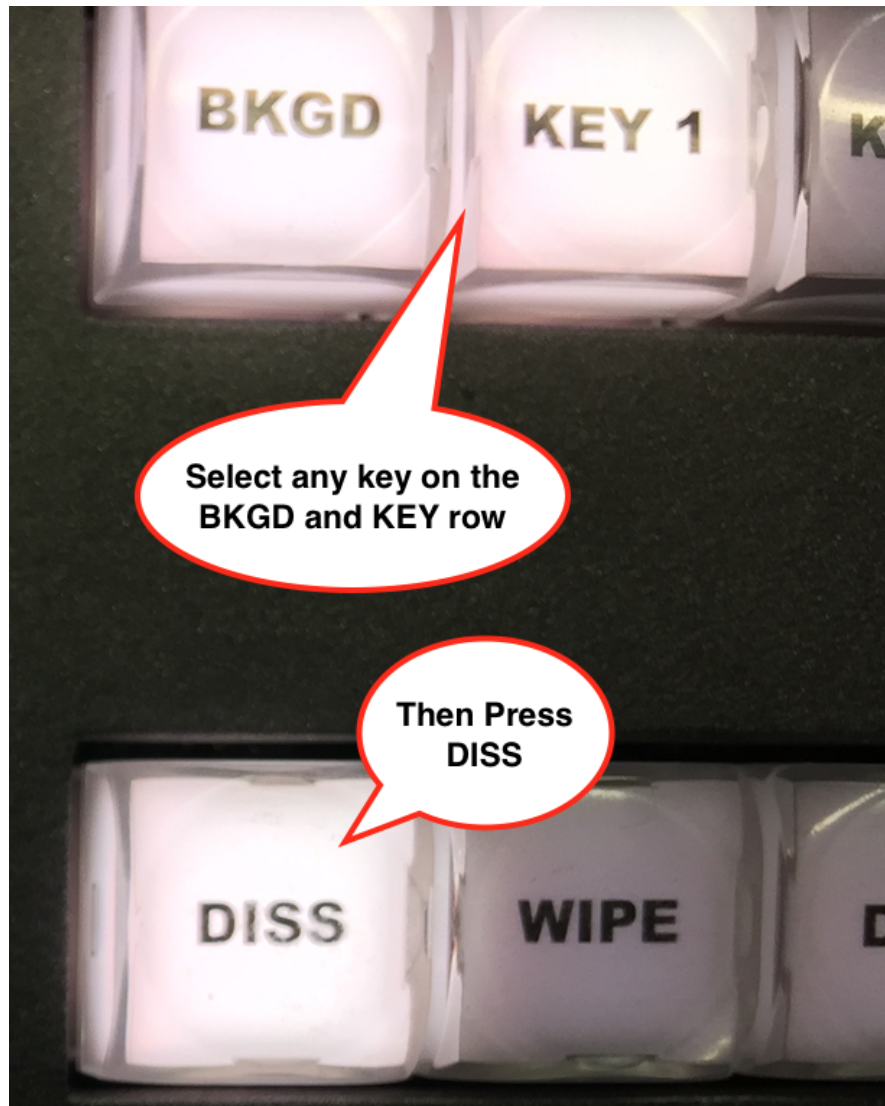# Ross - Crossover Switcher - How to set the Key Transition Durations Cuts
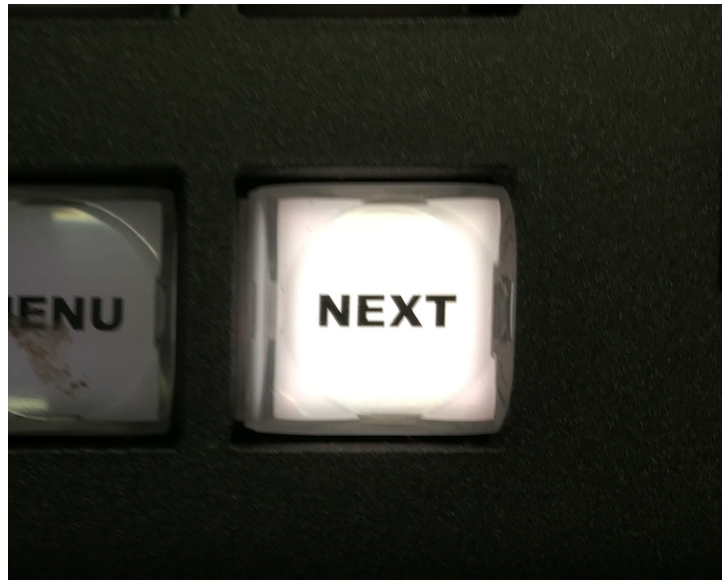
How to set the Key Transition Durations Cuts (0 frames) or Dissolves

Step One Press any key on the row of BKGD, KEY 1, KEY 2, OR KEY 3
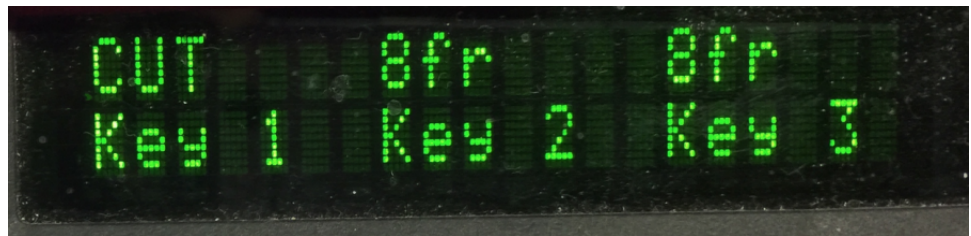
Then Press DISS

Then Press NEXT	
This menu comes up and allows you to set the transitions for keys and background transitions.	
Right now Key 1 will cut on and off Key 2 and 3 have a 8 frame transition Turn the corresponding knob to set the transition or cut setting	

Push the knob and turn it till you select the desired duration from "Cut" 0 frames to 999 frames maximum duration