
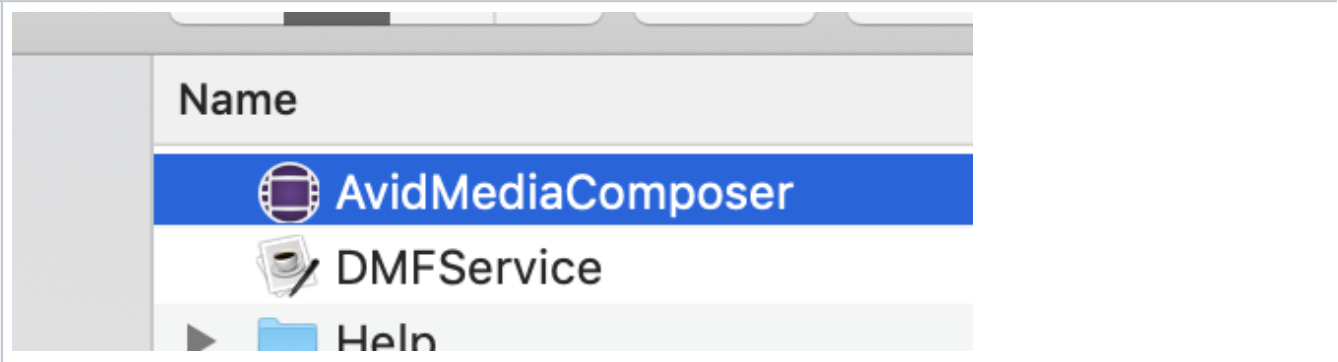
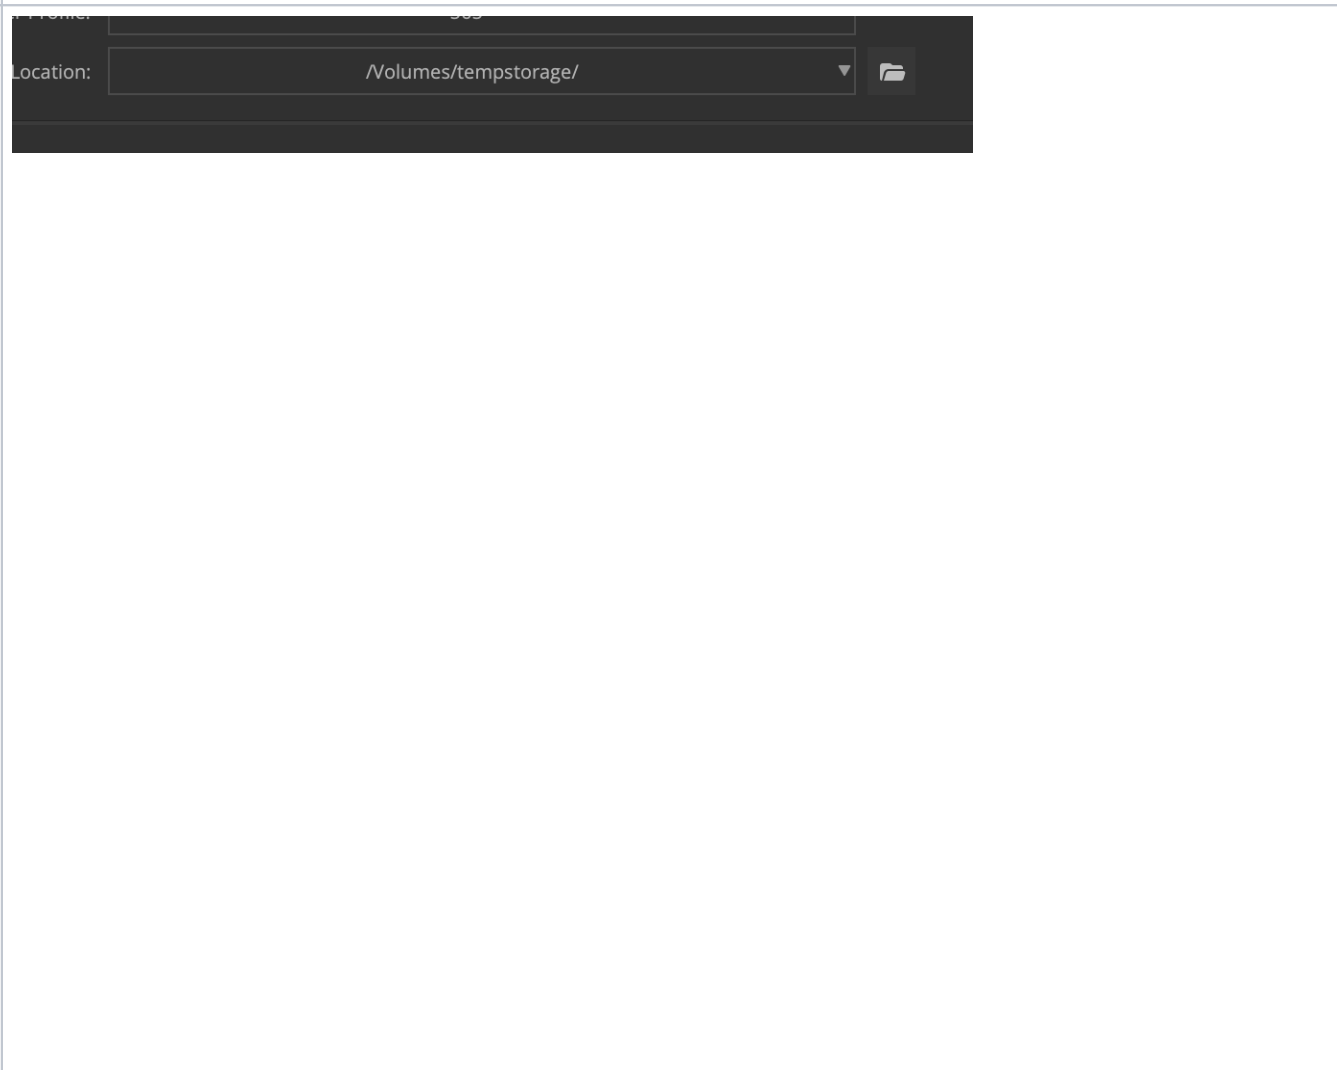



AVID - Panasonic - CX350 - Quick Start Editing Workflow

Launch AVID	
Click on the Folder ICON and navigate to where you want to save your file	

C
l
i
c
k
O
n
N
e
w
P
r
o
j
e
c
t

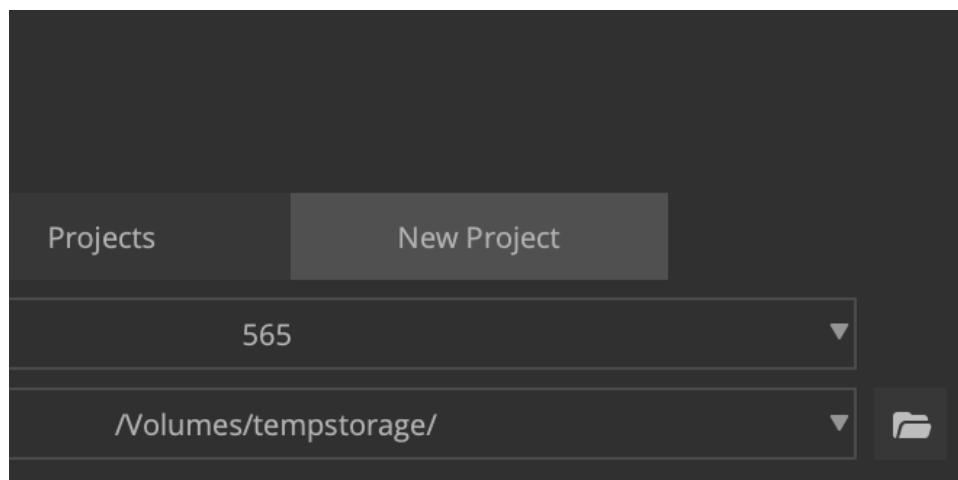

C
h
o
o
s
e
a
l
o
c
a
t
i
o
n
t
o
s
a
v
e
y
o
u
r
p
r
o
j
e
c
t

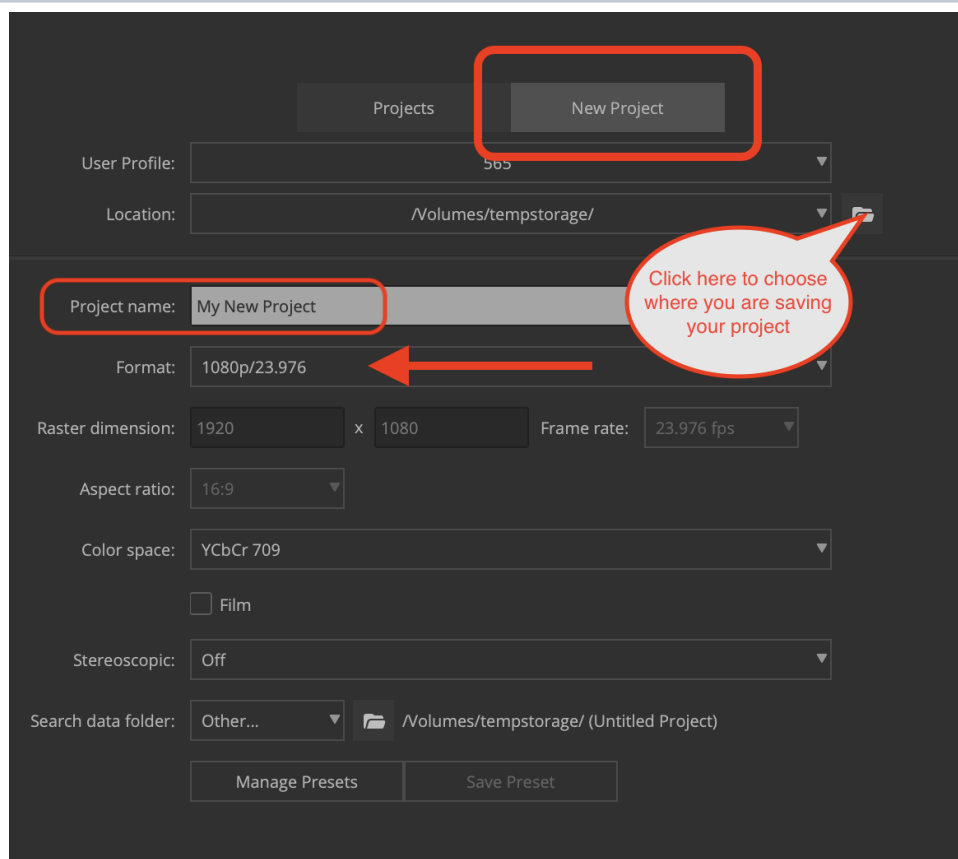

T
i
t
l
e
y
o
u
r
P
r
o
j
e
c
t
i
n
P
r
o
j
e
c
t
N
a
m
e

C
h
o
o
s
e
F
o
r
m
a
t
>
1
0
8
0
/2
3.
9
7
6
P
a
s
t
h
e
F
o
r
m
a
t
o
f
t
h
e
p
r
o
j
e
c
t

C
o
l
o
r
S
p
a
c
e
d
e
f
a
u
l
t
Y
C
b
C
r
7
09

Then Click on Create to load up the project


☐ Remote Client

Login

Quit

Create


By default a bin will open and you can use that as your video bin to import your raw footage

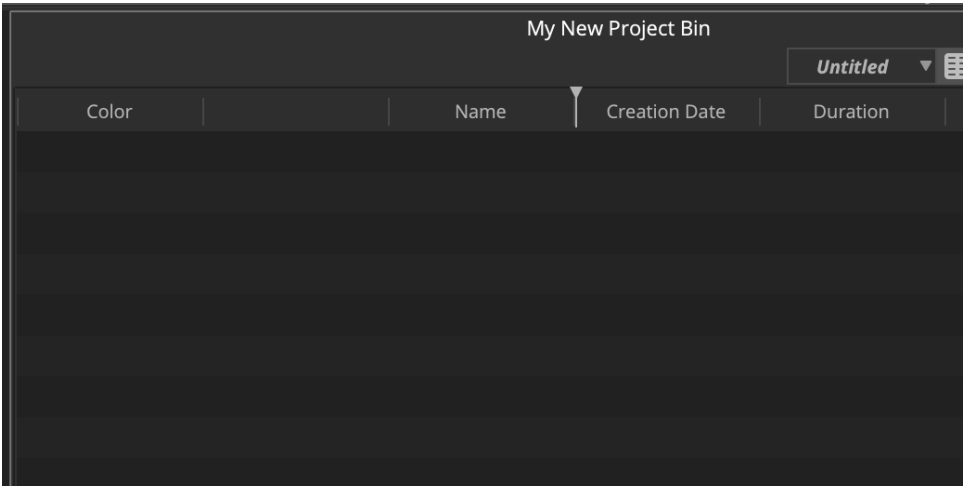

	Tools	Windows	Script	I
	Project		⌘9	
OV>	Timeline		⌘0	
ne	Composer		⌘4	
	Source Browser			

Click on Link
to import
not
to
the
Private
> PANA_GRP
folder
for
each
card

Click on Link

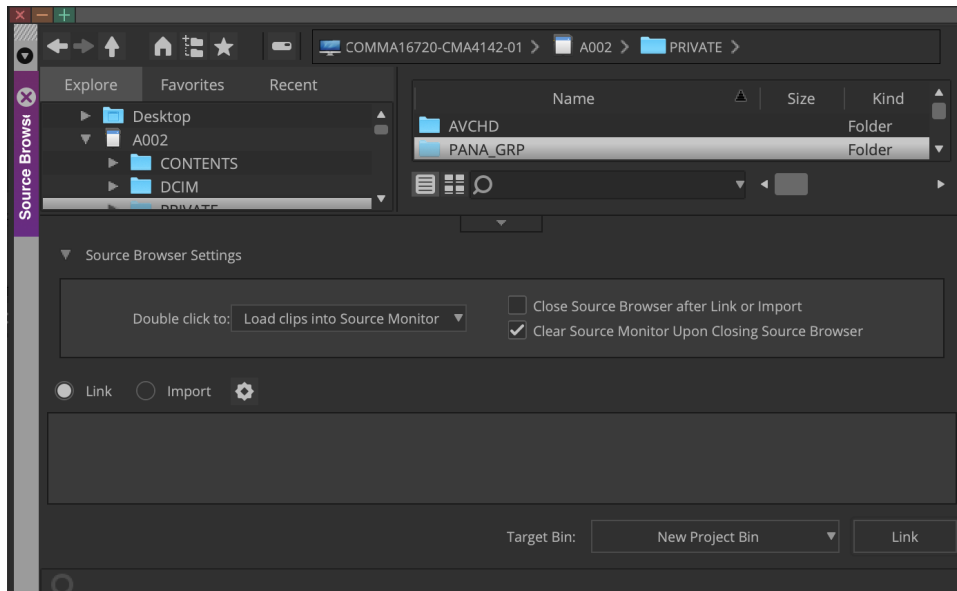

The clip will load into the Bin shown here

My Panasonic DVX UHD Proj Bin			
My Panasonic DVX UHD Proj Bin			
	Name	Duration	Drive
☐	H1000001	1:10:48:00	/Volumes/SK Work Drive/DVX200 Recording
☐	01030003	16:22:00	/Volumes/SK Work Drive/DVX200 Recording
☐	01030002	1:11:24:12	/Volumes/SK Work Drive/DVX200 Recording
☐	01030001	24:12	/Volumes/SK Work Drive/DVX200 Recording

In the BIN context menu

* New Project Bin

Format

Basic

Capture

Custom

Film

Format

Media Tool

Statistics

Save As

	Format	Video
Project	3840x2160p/23.976	AVC Long-GO
Project	3840x2160p/23.976	AVC Long-GO


That's for format of the files will be AVC Long-GOP High 422

* New Project Bin


Format

Color		Name	Project	Format	Video
☐		A002C002_190101_I98F	New Project	3840x2160p/23.976	AVC Long-GOP High422
☐		A002C001_190101_I98F	New Project	3840x2160p/23.976	AVC Long-GOP High422

Select the clips and choose > Clip > Consolidate/Transcode/Transcode

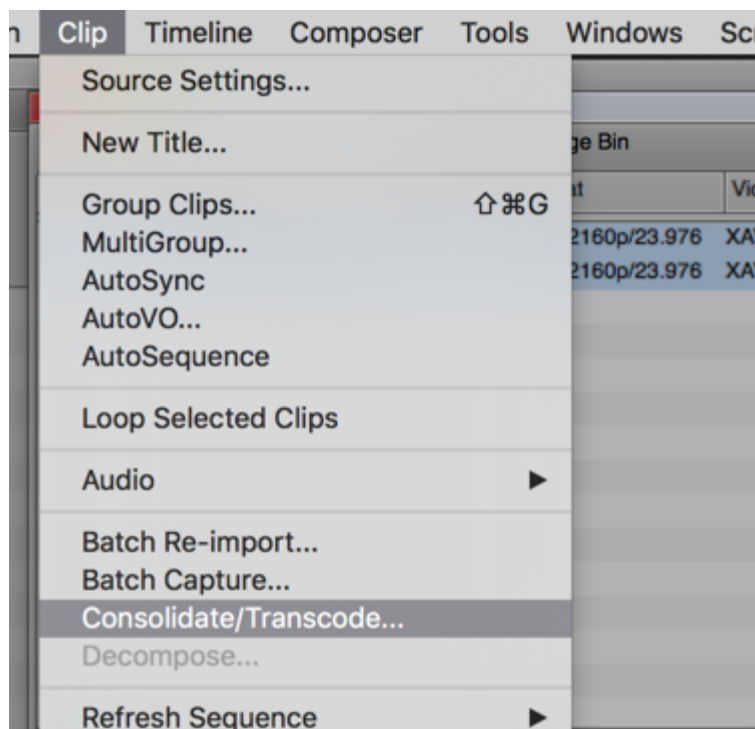

Choose your hard drive here

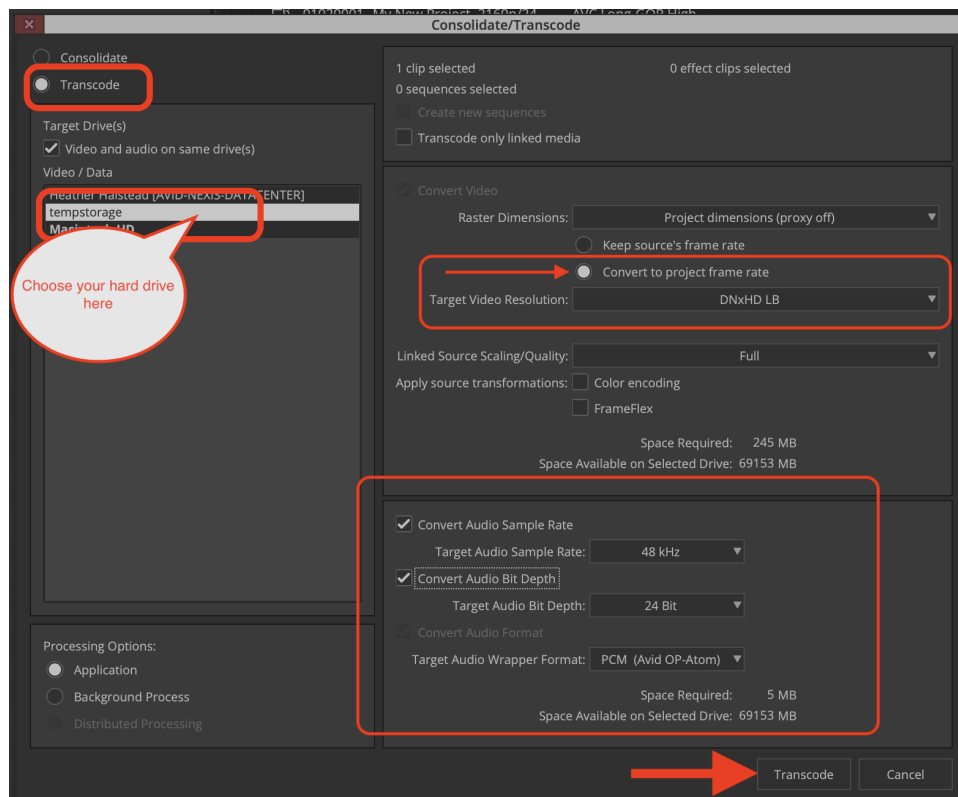

Then select where you want to save the consolidated attached files and choose the

"Target Video Resolution"

***M
a
k
e
s
u
r
e
y
o
u
h
a
v
e
C
o
n
v
e
rt
t
o
p
r
o
j
e
c
t
fr
a
m
e
r
at
e
s
el
e
ct
ed***

***W
e
re
c
o
m
m
e
nd***

D
N
x
H
D
L
B
M
X
F
fo
r
"
O
ff
in
e"
(
M
O
S
T
L
Y
U
S
E
D
C
H
O
I
C
E)

A
s
o
c
o
n
v
er
t
th
e
a
u
di
o
s
a
m
pl
e
ra
te
fo
r
c
o
n
si
st
e
n
cy

T
h
e
n
C
h
o
o
s
e
T
r
a
n
s
c
o
d
e

My Panasonic DVX UHD Proj Bin							
My Panasonic DVX UHD Proj Bin							
	Name	Project	Start	Format	Video	Comments	End
	01030001.new.01	My Panasonic DVX UHD Proj	00:00:16:16	3840x2160p/23.976	DNxHR HQ		00:00:41:04
	Untitled Sequence.01		01:00:00:00	3840x2160p/23.976			00:00:38:59:00
	01030001	My Panasonic DVX UHD Proj	00:00:16:16	3840x2160p/23.976	H.264	Transcoded Codec DNxHR HQ	00:00:41:04
	01030001	My Panasonic DVX UHD Proj	00:00:41:04	3840x2160p/23.976	H.264		00:01:28:05:16
	01030001	My Panasonic DVX UHD Proj	01:12:05:16	3840x2160p/23.976	H.264		00:01:28:27:16
	H1000001	My Panasonic DVX UHD Proj	01:28:27:16	3840x2160p/23.976	H.264		00:02:39:15:16

Use the .new file
not the file with the link
icon

don't use the
linked clip

When transcribing is finished, you will end up with files with a .new extension. In this session, you will use those files as the source for your new master clips.

Edit with the master clip not the linked file

Notice the difference in notation for a linked file

The linked files you can put in another bin as you won't need them til I finish all conform when you are picture located.